


eLED VECTRA-22 6MM

Flexible LED strip for indoor lighting. IP20
Tira LED flexible para uso interior. IP20



Tª color / Colour temp.

2700 K	3000 K	4200 K
Warm white Blanco cálido	Warm white Blanco cálido	Neutral white Blanco neutro

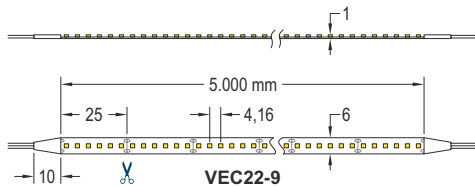

Protection IP20.

Fast and Easy to stick with 3M adhesive back.

Working Temperature Range: -20°C to 40°C.

Wire length: 200 mm.

CRI>90.

Wide 6 mm.

Packaging and weight on
www.elt.es/productos/packaging_ELТ.pdf
Instructions manual on
www.elt.es/productos/inst_manual.html

Protección IP20.

Equipado con cinta adhesiva 3M para una fácil y rápida instalación.

Rango de temperaturas de funcionamiento: -20°C a 40°C.

Longitud de los cables: 200 mm.

CRI>90.

Ancho 6 mm.

Embalaje y peso en
www.elt.es/productos/embalaje_ELТ.pdf
Manual de instrucciones:
www.elt.es/productos/manual_instrucciones.html

Technical characteristics / Características técnicas

	Ref. No.	Colour Color	DC Voltage Tensión DC	Colour temp. Tª. color		LED units meter Ud. LED metro	IP	Power meter Potencia por metro	Luminous efficacy meter Eficiencia luminosa metro	Luminous efficacy watt Eficiencia luminosa vatio	CRI	Wide Ancho		✂ pcs.	Meters per reel Metros por rollo
				V	K							mm	mm		
eLED VEC 22-9-927-24V	9955128		24	2700	240	20	9	710	79	>90	6	25	6	5	
eLED VEC 22-9-930-24V	9955129		24	3000	240	20	9	740	82	>90	6	25	6	5	
eLED VEC 22-9-942-24V	9955130		24	4200	240	20	9	820	91	>90	6	25	6	5	

Values tested on 1 m. LED strips / Valores testados en tiras LED de 1 m.

* Tolerance range for power and lm/m: ±10% / Rango de tolerancia potencia y lm/m: ±10%

Accesorios / Accessories



Advised to mount on an
aluminium profile
Recomendado instalación con
perfil disipador de aluminio



Logistical data
Datos logísticos
www.elt.es



LED / INDOOR SERIES / DECORATIVE LIGHTING - CONSTANT VOLTAGE / STRIPS
LED / SERIE INDOOR / ILUMINACIÓN DECORATIVA - TENSIÓN CONSTANTE / TIRAS