


eLED VECTRA-22

Flexible LED strip for outdoor lighting. IP65
Tira LED flexible para uso exterior. IP65

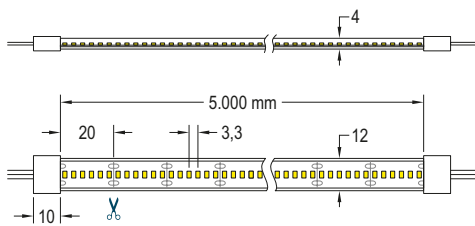

Tª color / Colour temp.

2700 K	3000 K	4200 K	6500 K
Warm white Blanco cálido	Warm white Blanco cálido	Neutral white Blanco neutro	Cool white Blanco frío

Protection IP65.

Fast and Easy to stick with 3M adhesive back.

Working Temperature Range: -20°C to 40°C.

Wire length: 200 mm.

Additional information at www.elt.es/en

Protección IP65.

Equipado con cinta adhesiva 3M para una fácil y rápida instalación.

Rango de temperaturas de funcionamiento: -20°C a 40°C.

Longitud de los cables: 200 mm.

Más información en www.elt.es

Technical characteristics / Características técnicas

	Ref. No.	Colour Color	DC	Colour	LED	IP	Power	Luminous	Luminous	CRI	Wide	✂	Meters per reel Metros por rollo	
			Voltage Tensión DC	temp. Tª. color	units meter Ud. LED metro		meter Potencia por metro	efficacy meter Eficiencia luminosa metro	efficacy watt Eficiencia luminosa vatío		Ancho			
			V	K			W/m	lm/m*	lm/W		mm	mm	pcs.	m
eLED VEC22-12-965-24V-IP65	9955124	6500	24	6500	300	65	12	1020	85	>90	12	20	6	5
eLED VEC22-12-942-24V-IP65	9955125	4200	24	4200	300	65	12	990	83	>90	12	20	6	5
eLED VEC22-12-930-24V-IP65	9955126	3000	24	3000	300	65	12	920	77	>90	12	20	6	5
eLED VEC22-12-927-24V-IP65	9955127	2700	24	2700	300	65	12	900	75	>90	12	20	6	5

Values tested on 1 m. LED strips / Valores testados en tiras LED de 1 m.

* Tolerance range for power and lm/m: ±10% / Rango de tolerancia potencia y lm/m: ±10%

Accesorios / Accessories



Advised to mount on an
aluminium profile
Recomendado instalación con
perfil disipador de aluminio



Logistical data
Datos logísticos
www.elt.es



LED / INDOOR SERIES / DECORATIVE LIGHTING - CONSTANT VOLTAGE / STRIPS
LED / SERIE INDOOR / ILUMINACIÓN DECORATIVA - TENSIÓN CONSTANTE / TIRAS