

G53 MINI



LED STRIPS up to: 1x20 mm
TIRAS LED hasta 2x12 mm
3x10 mm



HANGING
SUSPENDIDO


Big aluminium profile for LED strips Perfil de aluminio grande para tiras LED



Finish / Acabados

*On request / Bajo pedido

<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Anodized Anodizado	*Black anodized Negro anodizado	*White painted Pintado blanco

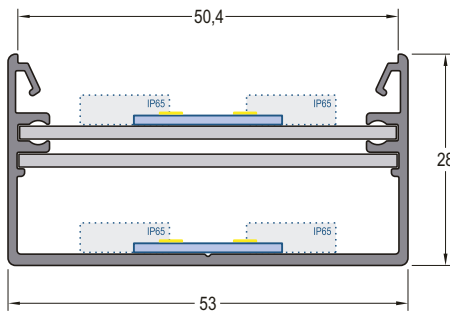

Blue rectangle shows the space for the LED strip
El rectángulo azul muestra el espacio para la tira de LED

G53 MINI: Aluminium profile a with 53 mm section to make luminaires in any length.

Fixing:
- Direct: Screw in the roof surface.
- Hanging with optional accessories.

Standard length: 2000 mm. Custom sizes available.

Cover eDEC DI-G53-20-ST: Cover made in polycarbonate with a light aperture of 120° to distribute light in an uniform way.

Cover eDEC DI-G53-20-NB: Cover made in polycarbonate with a light aperture of 90° to concentrate light beam.

Cover eDEC DI-G53-20-OP: Cover made in polycarbonate that distributes the light in an uniform way.

Cover eDEC CU-G53-20-A: Cover in anodized aluminium. Can be used as a platform to stick the LED strip and take them closer to the cover for a better performance as shown in the scheme.

G53 MINI: Perfil de aluminio con 53 mm de sección que puede utilizarse para construir luminarias en cualquier medida.

Fijación:
- Directa: Atornillado sobre superficie.
- Suspendido: Mediante accesorio opcional.

Longitud estándar: 2000 mm. Para otras longitudes se pueden hacer cortes a medida.

Difusor eDEC DI-G53-20-ST: Difusor de policarbonato con una apertura aproximada de 120° para repartir uniformemente la luz.

Difusor eDEC DI-G53-20-NB: Difusor de policarbonato con una apertura aproximada de 90° para concentrar la luz.


Difusor eDEC DI-G53-20-OP: Difusor de policarbonato que distribuye la luz uniformemente.

Cubierta eDEC CU-G53-20-A: Cubierta de aluminio anodizado. Puede utilizarse para colocar tiras de LED de hasta 40 mm de ancho más cerca del difusor para un mayor rendimiento tal y como se señala en el esquema.

Additional information at www.elt.es/en

Más información en www.elt.es

Profile / Perfil

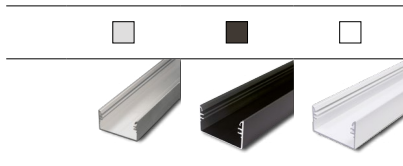



	eDEC G53M-20-A	eDEC G53M-20-B	eDEC G53M-20-W
Ref. No.	9955446	9955444	9955445
Weight Peso	0,950	0,980	1,070

Covers / Difusores



	eDEC DI-G53-20-ST	eDEC DI-G53-20-NB	eDEC DI-G53-20-OP
Ref. No.	9955433	9955435	9955436
Weight Peso	0,200	0,200	0,200

Cover / Cubierta



	eDEC CA-G53-20-A	eDEC CU-G53-20-A
Ref. No.	9955437	9955441
Weight Peso	0,530	0,436

Accessories / Accesorios

	Model	Ref. No.	Uds	Description / Descripción	Model	Ref. No.	Uds	Description / Descripción
Endings / Tapas	eDEC TA-G53M-G	9955447	2	Without hole / Sin agujero Ending thickness increases the length of the profile El espesor de la tapa final aumenta la longitud del perfil	Suspension wire Cable de suspensión	eDEC CS-G53-15	9955439	Suspension wire length / Long. cable suspensión: ref. 9955439 - 1500 mm ref. 9955440 - 3000 mm
	eDEC TA-G53M-B	9955448						
	eDEC TA-G53M-W	9955457						
Suspension wire and holder / Cable de suspensión y soporte	eDEC CS-G23-15	9955474	2	Maximum weight 10 Kg. Suspension wire length: 1500 mm Longitud cable suspensión: 1500 mm Máximo peso 10 Kg.	eDEC CS-G53-30	9955440	1	Recommended 1 ud / m. Recomendado 1 ud / m. Maximum weight 1 ud / 5 Kg. Peso máximo 1 ud / 5 Kg.

